

Glidewire®

Hydrophilic Coated Guidewire

MASTER YOUR CHOICE FOR PROCEDURE SUCCESS

The TERUMO GLIDEWIRE® product line that you know and trust offers an expanded range of tip shapes and wire configurations, making it possible for you to find the right tools for your challenging procedures.

1. Stiff GLIDEWIRE®

- Extra support and guidewire pushability designed to help straighten tortuous vasculature for better device delivery

2. 1 cm Taper GLIDEWIRE®

- Shorter taper designed to help cross stenotic lesions

3. Long Taper GLIDEWIRE®

- Long taper designed to both help maintain catheter tip shape and gain deeper vessel purchase to support guidewire advancement

4. J-Tip GLIDEWIRE®


- J-curve designed to provide atraumatic tip and avoid selection of vessel side branches

5. Shapeable GLIDEWIRE®

- Tip can be custom shaped to match unusual vessel take-offs

6. Bolia Curve GLIDEWIRE®

- Unique double-angle designed to facilitate selection of unusual vessel angles and take-offs

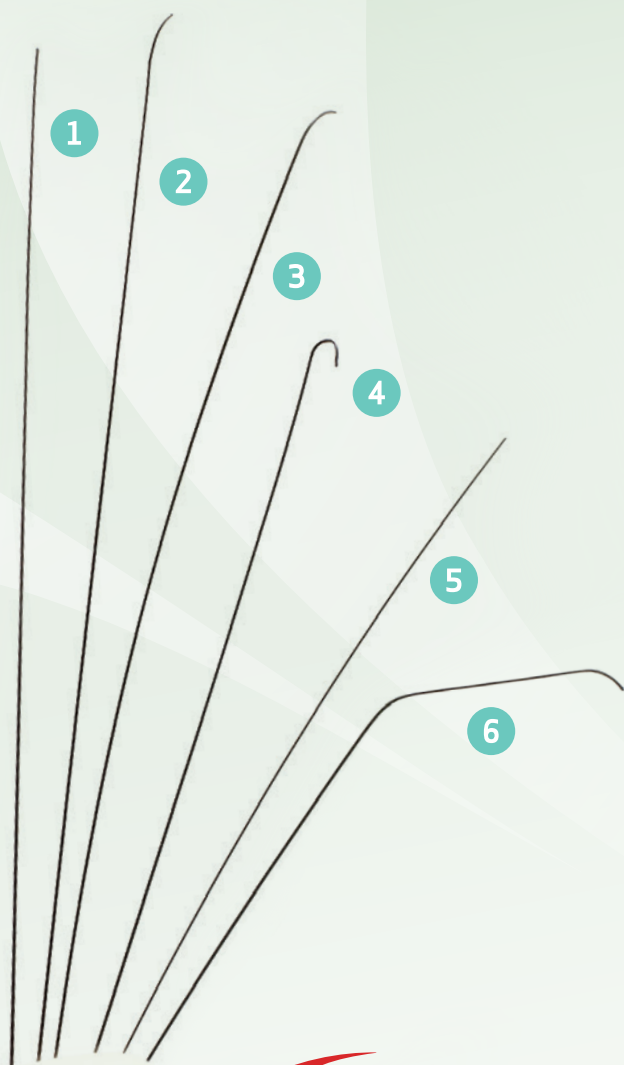

TERUMO
INTERVENTIONAL
SYSTEMS

PUSHING BOUNDARIES

Terumo Interventional Systems is **committed to your success** with innovative procedural solutions and ongoing support for your most challenging cases.

We are relentlessly seeking new ways to help you achieve **better outcomes for more patients.**



Consistent, reliable TERUMO GLIDEWIRE® performance designed to get you there

With TERUMO Glide Technology™ hydrophilic coating proven to have superior lubricity retention^{1-3*}, and a super-elastic nitinol alloy core for optimal performance and kink resistance, the TERUMO GLIDEWIRE® offers reliable performance you know and trust.

	PRODUCT CODE	WIRE TYPE	DIAMETER	TOTAL LENGTH	FLEXIBLE TIP LENGTH	TIP SHAPE
Stiff Shaft GLIDEWIRE®	GS3505	Stiff	0.035"	80 cm	3 cm	Angle
	GS3506	Stiff	0.035"	150 cm	3 cm	Angle
	GS3508	Stiff	0.035"	180 cm	3 cm	Angle
	GS3509	Stiff	0.035"	260 cm	3 cm	Angle
	GS3501	Stiff	0.035"	150 cm	3 cm	Straight
	GS3503	Stiff	0.035"	180 cm	3 cm	Straight
	GS3504	Stiff	0.035"	260 cm	3 cm	Straight
	GS3804	Stiff	0.038"	80 cm	3 cm	Angle
	GS3805	Stiff	0.038"	150 cm	3 cm	Angle
	GS3807	Stiff	0.038"	180 cm	3 cm	Angle
Long Taper GLIDEWIRE®	GS3507	Stiff	0.035"	150 cm	5 cm	Angle
	GS3510	Stiff	0.035"	260 cm	5 cm	Angle
	GS3502	Stiff	0.035"	150 cm	5 cm	Straight
	GS3806	Stiff	0.038"	150 cm	5 cm	Angle
	GS3802	Stiff	0.038"	150 cm	5 cm	Straight
	GR3507	Standard	0.035"	150 cm	8 cm	Angle
	GR3502	Standard	0.035"	150 cm	8 cm	Straight
	GR3807	Standard	0.038"	150 cm	8 cm	Angle
	GR3802	Standard	0.038"	150 cm	8 cm	Straight
	1 cm Taper GLIDEWIRE®	GR3515	Standard	0.035"	150 cm	1 cm
GR3516		Standard	0.035"	180 cm	1 cm	Angle
GR3517		Standard	0.035"	260 cm	1 cm	Angle
GR3518		Standard	0.035"	150 cm	1 cm	Straight
GR3519		Standard	0.035"	180 cm	1 cm	Straight
GR3520		Standard	0.035"	260 cm	1 cm	Straight
GS3511		Stiff	0.035"	150 cm	1 cm	Angle
Shapeable Tip GLIDEWIRE®	GE3501	Standard	0.035"	150 cm	3 cm	Straight/Shapeable
	GE3502	Standard	0.035"	180 cm	3 cm	Straight/Shapeable
	GE3801	Standard	0.038"	150 cm	3 cm	Straight/Shapeable
J-Tip GLIDEWIRE®	GR3510	Standard	0.035"	150 cm	3 cm	3.0 mm J-tip
	GR3810	Standard	0.038"	150 cm	3 cm	3.0 mm J-tip
	GR3525	Standard	0.035"	180 cm	3 cm	1.5 mm J-tip
	GR3526	Standard	0.035"	260 cm	3 cm	1.5 mm J-tip
Bolia Curve GLIDEWIRE®	GR3521	Standard	0.035"	180 cm	5 cm	Bolia
	GR3522	Standard	0.035"	180 cm	8 cm	Bolia

FIND OUT MORE ☎ Phone: 800.862.4143 🌐 terumo.com 📠 Fax: 800.411.5870

*When compared to ZIPwire™, HiWire®, AQUATRACK®, and Laureate®.

References:

- Shah A, Lau C, Stavropoulos SW, et al. Comparison of physician-rated performance characteristics of hydrophilic-coated guidewires. *J Vasc Interv Radiol.* 2008 Mar;19(3):400-5.
- Niaz K, Farooqi F, Devireddy C, Robertson G, Shaw RE. Comparison of hydrophilic guidewires used in endovascular procedures. *J Invasive Cardiol.* 2009 Aug;21(8):397-400.
- Data on file.

RX ONLY. Refer to the product labels and package insert for complete warnings, precautions, potential complications, and instructions for use.

©2019 Terumo Medical Corporation. All rights reserved. All brand names are trademarks or registered trademarks of their respective owners. PM-01642

