

IMPROVE OUTCOMES

AND REDUCE COMPLICATIONS

A comprehensive line of uniquely-designed products






AIM TO IMPROVE CLINICAL AND OPERATIONAL OUTCOMES

Femoral access site bleeding is the #1 complication in percutaneous coronary intervention (PCI) $^{\rm 1}$

The average femoral bleeding complication can lead to:

- Additional 2-6 days in hospital²
- Incurred cost of \$6,377 for major and minor bleeding¹

Complications in Femoral Access Procedures¹

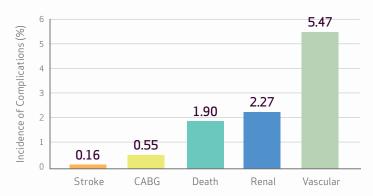

Vascular complications occur more often than all other complications combined in femoral access procedures.


MicroAccess

Standard Sheaths

Pinnacle Precision

Pinnacle Pinnacle Pinnacle TIF TIP

Standard Shedthis Hedispeque Shedthi

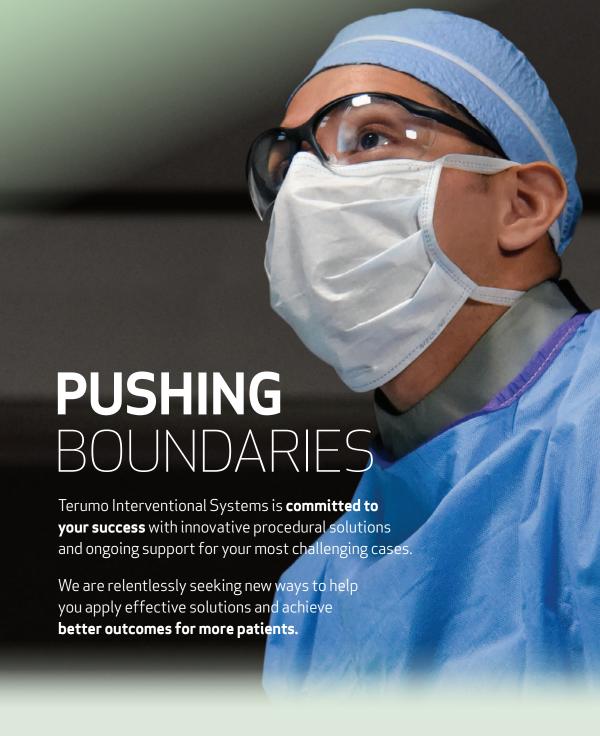

FIND OUT MORE Phone: 800.888.3786 terumois.com

RX ONLY. Refer to the product labels and package insert for complete warnings, precautions, potential complications, and instructions for use.

References:

1. Kugelmass AD, Cohen DJ, Brown PP, et al. *Am J Cardiol*. 2006;97(3):322-327. 2. Aguirre FV, Gill JB. *J Invasive Cardiol*. 2002;14(suppl B):48B-54B. 3. Pinto DS, Stone GW, Shi C, et al. *J Am Coll Cardiol*. 2008;52(22):1758-1768. 4. Criado FJ. *Vasc Dis Manage*. 2009;6(1):28-29. 5. Data on file. MAK Design Verification Report #20110024 5/23/11. 6. Data on file. Pinnacle Precision Access System Competitor Evaluation Report #20170018. 7. Data on file. Pinnacle and Pinnacle TIF Tip Competitor Evaluation Report #20170019. 8. Data on file. Pinnacle R/O II Competitor Evaluation Report #20170020. 9. Data on file. Pinnacle R/OII HiFlo Competitor Evaluation Report #20170021.

©2023 Terumo Medical Corporation. All rights reserved. All brand names are trademarks or registered trademarks of their respective owners. PM-07017




Pinnacle Precision

Access System

Help achieve smooth atraumatic vascular access through calcified or scarred arteries⁵

Competitive sheath requires 77% higher insertion force than Total Integrated Fit (TIF) technology⁶

- Tapered needle enables transitions from 21G tip to 19G shaft for better blood return
- Back bevel cuts help to facilitate a straighter entry⁵
- Greater rail strength to prevent buckling with the only 0.021" wire on the market⁶
- Seamless guidewire-to-dilator and dilator-to-sheath transition for challenging access situations⁶
- Highly flexible design resists kinking and helps reduce complications⁶

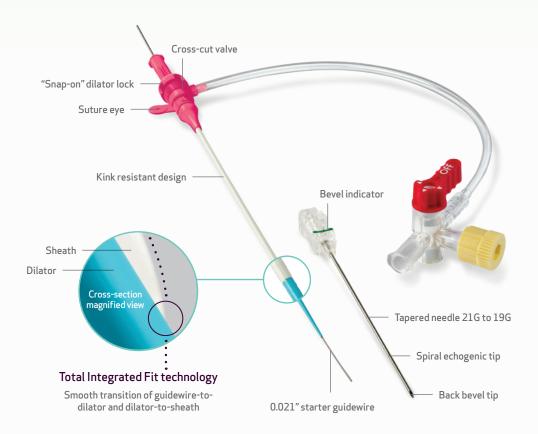



Pinnacle Precision

Access System

ORDERING INFORMATION

Packed 10 per box and includes dilator. All dilators are 0.021" wire compatible.


| PINNACLE® PRECISION ACCESS SYSTEM® Sheath | | | | | | | | |
|---|------------------|-----------------|-----------|--|--|--|--|--|
| CODE | SHEATH SIZE (Fr) | WIRE | NEEDLE | | | | | |
| 70-4160 | 4 | Nitinol | Echogenic | | | | | |
| 70-4130 | 4 | Stainless Steel | Echogenic | | | | | |
| 70-5160 | 5 | Nitinol | Echogenic | | | | | |
| 70-5130 | 5 | Stainless Steel | Echogenic | | | | | |
| 70-6160 | 6 | Nitinol | Echogenic | | | | | |
| 70-6130 | 6 | Stainless Steel | Echogenic | | | | | |
| 70-7160 | 7 | Nitinol | Echogenic | | | | | |
| 70-7130 | 7 | Stainless Steel | Echogenic | | | | | |
| 70-8160 | 8 | Nitinol | Echogenic | | | | | |
| 70-8130 | 8 | Stainless Steel | Echogenic | | | | | |
| 70-4165 | 4 Stiff* | Nitinol | Echogenic | | | | | |
| 70-4135 | 4 Stiff* | Stainless Steel | Echogenic | | | | | |
| 70-5165 | 5 Stiff* | Nitinol | Echogenic | | | | | |
| 70-5135 | 5 Stiff* | Stainless Steel | Echogenic | | | | | |

^{*}Includes a stiff dilator for greater pushability








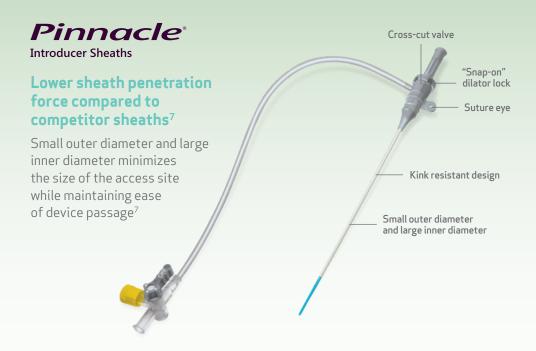

Pinnacle TIF TIP

Introducer Sheaths

Total Integrated Fit (TIF) technology requires less penetration force than comparable sheaths⁷

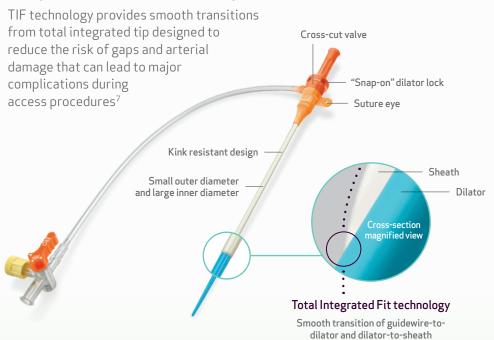

PINNACLE® Sheaths are from the maker of the #1 preferred and most used introducer sheaths on the market





Pinnacle TIF TIP

Introducer Sheaths **Introducer Sheaths**

ORDERING INFORMATION

Packed 10 per box and includes dilator. All dilators are 0.038" wire compatible.

| PINNACLE® Introducer Sheaths Coronary Applications | | | | PINNACLE® Introducer Sheaths Peripheral Applications | | | | | |
|---|----------------|-------------------|-------------------------------|--|--------|----------------|-------------------|-------------------------------|-----------------------------|
| CODE | LENGTH (cm) | INNER DIAMETER | MINI GUIDEWIRE DIAMETER | MINI Guidewire Length | CODE | LENGTH (cm) | INNER DIAMETER | MINI GUIDEWIRE DIAMETER | MINI Guidewire Length |
| RSS402 | 10 | 4 | .035* | 45 | RSS401 | 10 | 4 | .035* | 45 |
| RSS502 | 10 | 5 | .038* | 45 | RSS501 | 10 | 5 | .035* | 45 |
| RSS602 | 10 | 6 | .038* | 45 | RSS601 | 10 | 6 | .035* | 45 |
| RSS702 | 10 | 7 | .038* | 45 | RSS701 | 10 | 7 | .035* | 45 |
| RSS802 | 10 | 8 | .038* | 45 | RSS801 | 10 | 8 | .035* | 45 |
| RSS902 | 10 | 9 | .038* | 45 | RSS901 | 10 | 9 | .035* | 45 |
| RSS002 | 10 | 10 | .038* | 45 | RSS001 | 10 | 10 | .035* | 45 |
| RSS102 | 10 | 11 | .038* | 45 | RSS101 | 10 | 11 | .035* | 45 |
| RSS404 | 10 | 4 | _ | _ | RSS403 | 10 | 4 | _ | |
| RSS504 | 10 | 5 | _ | | RSS503 | 10 | 5 | _ | _ |
| RSS604 | 10 | 6 | _ | _ | RSS603 | 10 | 6 | _ | _ |
| RSS704 | 10 | 7 | _ | _ | RSS703 | 10 | 7 | _ | _ |
| RSS804 | 10 | 8 | _ | _ | RSS803 | 10 | 8 | _ | _ |
| RSS904 | 10 | 9 | _ | _ | RSS903 | 10 | 9 | _ | |
| RSS004 | 10 | 10 | _ | _ | RSS003 | 10 | 10 | _ | _ |
| RSS104 | 10 | 11 | _ | _ | RSS103 | 10 | 11 | _ | _ |
| RSS506 | 25 | 5 | _ | _ | RSS505 | 25 | 5 | _ | |
| RSS606 | 25 | 6 | _ | _ | RSS605 | 25 | 6 | _ | _ |
| RSS706 | 25 | 7 | _ | | RSS705 | 25 | 7 | _ | _ |
| RSS806 | 25 | 8 | _ | _ | RSS805 | 25 | 8 | _ | |
| RSS906 | 25 | 9 | _ | _ | RSS905 | 25 | 9 | _ | _ |
| RSS006 | 25 | 10 | _ | | RSS005 | 25 | 10 | _ | |
| RSS106 | 25 | 11 | | | PSS105 | 25 | 11 | | |


Dilator Protuding Length = 2.5 cm

^{*}Mini stainless steel spring coil guidewire included. Maximum guidewire compatible size: 0.035" for 4 Fr, 0.038" for all others

| PINNACLE® TIF TIP™ Introducer Sheath | | | | | | | | | |
|--------------------------------------|----------------|----------------|---------------------------------|--|---------|----------------|----------------|---------------------------------|--|
| CODE | LENGTH (cm) | FRENCH SIZE | MINI GUIDEWIRE DIAMETER (in) | | CODE | LENGTH (cm) | FRENCH Size | MINI GUIDEWIRE DIAMETER (in) | |
| 10-2031 | 10 | 5 | 0.035 | | 10-2531 | 10 | 5 | 0.038 | |
| 10-2032 | 10 | 6 | 0.035 | | 10-2532 | 10 | 6 | 0.038 | |
| 10-2033 | 10 | 7 | 0.035 | | 10-2533 | 10 | 7 | 0.038 | |
| 10-2034 | 10 | 8 | 0.035 | | 10-2534 | 10 | 8 | 0.038 | |

Dilator Protuding Length = 2.5 cm








Pinnacle® R/Oll

Radiopaque Marker Introducer Sheaths

Platinum/iridium radiopaque marker band is designed to enhance visibility

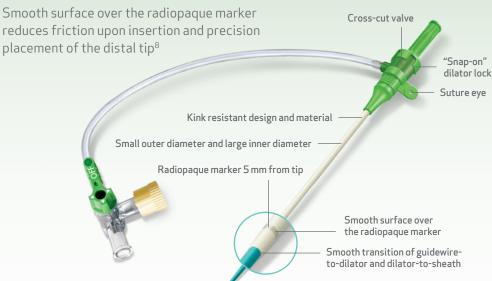


Pinnacle® R/O II HiFlo

Radiopaque Marker Introducer Sheaths

Higher flow rates with 45° side tube take-off provides smooth flow dynamic within the sheath

Shorter 4 cm sheath and stiff dilator enhances pushability for easier and more efficient superficial access procedures⁹

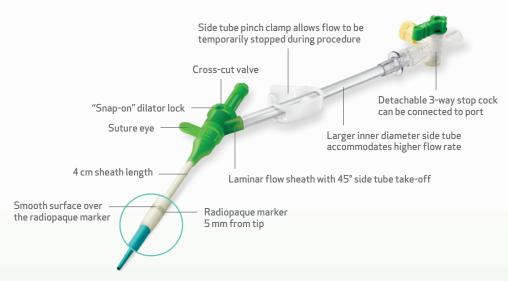

PINNACLE° Sheaths are from the maker of the #1 preferred and most used introducer sheaths on the market



Pinnacle R/Oll

Pinnacle R/O II HiFlo

Radiopaque Marker Introducer Sheaths

Radiopaque Marker Introducer Sheaths


ORDERING INFORMATION

Packed 10 per box and includes dilator. All dilators are 0.038" wire compatible.

| PINNACLE® R/O | II Radiopaque Marker Introducer Sheath | | | | | | | |
|---------------|--|------------------------|-----------------------------------|---------------------------------|--|--|--|--|
| CODE | LENGTH (cm) | INNER DIAMETER (Fr) | DILATOR PROTRUDING LENGTH (cm) | MINI GUIDEWIRE DIAMETER (in) | | | | |
| RSB401 | 6 | 4 | 2.5 | _ | | | | |
| RSB501 | 6 | 5 | 2.5 | _ | | | | |
| RSB601 | 6 | 6 | 2.5 | _ | | | | |
| RSB701 | 6 | 7 | 2.5 | _ | | | | |
| RSB801 | 6 | 8 | 2.5 | _ | | | | |
| RSB901 | 6 | 9 | 2.5 | _ | | | | |
| RSB402 | 10 | 4 | 2.5 | _ | | | | |
| RSB502 | 10 | 5 | 2.5 | _ | | | | |
| RSB602 | 10 | 6 | 2.5 | _ | | | | |
| RSB702 | 10 | 7 | 2.5 | _ | | | | |
| RSB802 | 10 | 8 | 2.5 | _ | | | | |
| RSB902 | 10 | 9 | 2.5 | | | | | |
| RSB403 | 25 | 4 | 2.5 | | | | | |
| RSB503 | 25 | 5 | 2.5 | | | | | |
| RSB603 | 25 | 6 | 2.5 | | | | | |
| RSB703 | 25 | 7 | 2.5 | | | | | |
| RSB803 | 25 | 8 | 2.5 | | | | | |
| RSB903 | 25 | 9 | 2.5 | | | | | |
| RSB411 | 6 | 4 | 2.5 | 0.035 | | | | |
| RSB511 | 6 | 5 | 2.5 | 0.038 | | | | |
| RSB611 | 6 | 6 | 2.5 | 0.038 | | | | |
| RSB711 | 6 | 7 | 2.5 | 0.038 | | | | |
| RSB811 | 6 | 8 | 2.5 | 0.038 | | | | |
| RSB911 | 6 | 9 | 2.5 | 0.038 | | | | |
| RSB412 | 10 | 4 | 2.5 | 0.035 | | | | |
| RSB512 | 10 | 5 | 2.5 | 0.038 | | | | |
| RSB612 | 10 | 6 | 2.5 | 0.038 | | | | |
| RSB712 | 10 | 7 | 2.5 | 0.038 | | | | |
| RSB812 | 10 | 8 | 2.5 | 0.038 | | | | |
| RSB912 | 10 | 9 | 2.5 | 0.038 | | | | |

| PINNACLE® R/O II HiFlo Introducer Sheath | | | | | | | | | |
|--|---------------------|-----------------------|-----------------------------|--------------------|--|--|--|--|--|
| CODE | SHEATH SIZE (Fr) | SHEATH LENGTH (cm) | MAX GUIDEWIRE COMPATIBLE | SHORT GUIDEWIRE | | | | | |
| RSB604H | 6 | 4 | 0.038" | Spring 0.035"/40cm | | | | | |
| RSB704H | 7 | 4 | 0.038" | Spring 0.035"/40cm | | | | | |
| RSB804H | 8 | 4 | 0.038" | Spring 0.035"/40cm | | | | | |
| RSB605H | 6 | 4 | 0.038" | No Wire | | | | | |
| RSB705H | 7 | 4 | 0.038" | No Wire | | | | | |
| RSB805H | 8 | 4 | 0.038" | No Wire | | | | | |







Pinnacle Destination

Guiding Sheath

Shapes and sizes to meet your diagnostic challenges¹⁰

Specially designed atraumatic tip

Minimizes potential for vessel damage

Smooth transitions


• Guidewire-to-dilator and dilator-to-sheath

Provides lesion access

Atraumatic tip

• Exceptional trackability, even in the most challenging anatomy


Hydrophilic coating on distal end

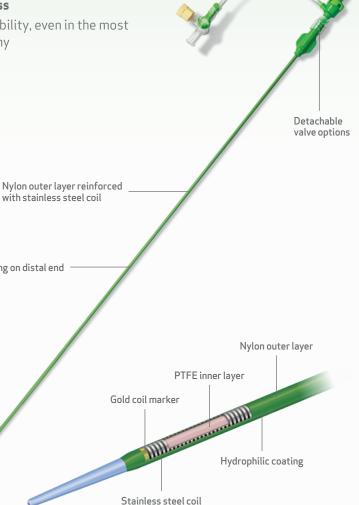



Pinnacle Destination

Guiding Sheath

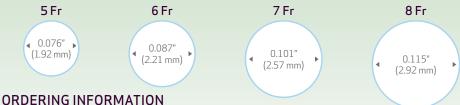

Packed 1 per box and includes dilator. All dilators are 0.038" wire compatible.

| | PINNACLE® DESTINATION Guiding Sheaths | | | | | | | | |
|----------------|---------------------------------------|----------------|------------------------------------|--------------------------|----------------|----------------|--|--|--|
| FRENCH SIZE | PRODUCT CODE | LENGTH (cm) | HYDROPHILIC COATING LENGTH (cm) | VALVE TYPE | CURVE STYLE | CURVE SHAPE | | | |
| | 54-54501 | 45 | 35 | Cross-Cut | Straight | | | | |
| гг. | 54-54502 | 45 | 5 | Cross-Cut | Hockey Stick | | | | |
| 5 Fr | 54-54503 | 45 | 5 | Cross-Cut | Multi-Purpose | | | | |
| | 54-54504 | 45 | 5 | Cross-Cut | RDC | | | | |
| | 54-64501 | 45 | 35 | Cross-Cut | Straight | | | | |
| | 54-64506 | 45 | 35 | Tuohy-Borst | Straight | | | | |
| | RSR01 | 45 | 5 | Cross-Cut | Straight | | | | |
| | RSR02 | 45 | 5 | Cross-Cut | Hockey Stick | | | | |
| | RSR03 | 45 | 5 | Cross-Cut | Multi-Purpose | | | | |
| | RSR07 | 45 | 5 | Tuohy-Borst | Straight | | | | |
| | RSR08 | 45 | 5 | Tuohy-Borst | Hockey Stick | | | | |
| | RSR09 | 45 | 5 | Tuohy-Borst | Multi-Purpose | | | | |
| 6 Fr | RSR13 | 45 | 5 | Cross-Cut | RDC | | | | |
| 011 | RSR14 | 45 | 5 | Cross-Cut | LIMA | | | | |
| | RSR17 | 45 | 5 | Tuohy-Borst | RDC | | | | |
| | RSR18 | 45 | 5 | Tuohy-Borst | LIMA | | | | |
| | RSP01 | 65 | 35 | Cross-Cut | Straight | | | | |
| | RSP03 | 65 | 35 | Tuohy-Borst | Straight | | | | |
| | RSC01 | 90 | 15 | Tuohy-Borst | Straight | | | | |
| | RSC03 | 90 | 15 | Tuohy-Borst | Multi-Purpose | | | | |
| | RSC05 | 90 | 15 | Cross-Cut | Straight | | | | |
| | RSC07 | 90 | 15 | Cross-Cut | Multi-Purpose | | | | |
| | 54-74501 | 45 | 35 | Cross-Cut | Straight | | | | |
| | 54-74506 | 45 | 35 | Tuohy-Borst | Straight | | | | |
| | RSR04 | 45 | 5 | Cross-Cut | Straight | | | | |
| | RSR05 | 45 | 5 | Cross-Cut | Hockey Stick | | | | |
| | RSR06 | 45 | 5 | Cross-Cut | Multi-Purpose | | | | |
| | RSR10 | 45 | 5 | Tuohy-Borst | Straight | | | | |
| | RSR11 | 45 | 5 | Tuohy-Borst | Hockey Stick | | | | |
| | RSR12 | 45 | 5 | Tuohy-Borst | Multi-Purpose | | | | |
| 7 Fr | RSR15 | 45 | 5 | Cross-Cut | RDC | | | | |
| | RSR16 | 45 | 5 | Cross-Cut | LIMA | | | | |
| | RSR19 | 45 | 5 | Tuohy-Borst | RDC | | | | |
| | RSR20 | 45 | 5 | Tuohy-Borst | LIMA | | | | |
| | RSP02 | 65 | 35 | Cross-Cut | Straight | | | | |
| | RSP04 | 65 | 35 | Tuohy-Borst | Straight | | | | |
| | RSC02 | 90 | 15 | Tuohy-Borst | Straight | | | | |
| | RSC04 | 90 | 15 | Tuohy-Borst | Multi-Purpose | | | | |
| | RSC06 | 90 | 15 | Cross-Cut | Straight | | | | |
| | RSC08 | 90 | 15 | Cross-Cut | Multi-Purpose | | | | |
| | 54-84501 | 45 4F | 35 | Cross-Cut | Straight | | | | |
| | 54-84506 | 45 | 35 | Tuohy-Borst | Straight | | | | |
| 8 Fr | 54-86501 | 65 | 35 | Cross-Cut | Straight | | | | |
| | 54-86506 | 65 | 35 | Tuohy-Borst | Straight | | | | |
| | 54-89001 | 90 | 60 60 | Cross-Cut Tuohy-Borst | Straight | | | | |
| | 54-89006 | 90 | UU | ruony-borst | Straight | | | | |

FIND OUT MORE

